
VL 38 TABLE LAMP

Designed by Vilhelm Lauritzen



Technical specifications

Materials

Base: Die cast aluminium.
Shade: Spun aluminium.
Stem: Brushed brass, untreated.

Finishes

Black or White, powder coated.
Brushed brass, untreated.

Mounting

Cable type: Plastic cord. Cable length: 3,3m. Light control: Switch in the lamp stand. 2 light levels. Timer function: 4 hours/8 hours. LED driver: separate, plugs into power outlet. For mounting instructions, see download section on the product detail page.

Information


Please note that the brass surfaces are untreated. This means that the surface will change over time and develop a patina. Function to set a fixed light level each time the lamp is connected to main power. LED driver fitted externally on cord. Two light levels 50% or 100%. Timer function to automatically turn off the light after amount of time, selectable between off/4 hours/8 hours. Adjustable (up and down) lamp shade. This product is fitted with an integrated energy-saving LED light source. Should you wish to replace it, please contact Louis Poulsen so we can help you purchase the correct LED Replacement Kit. Please note that LED-replacement should always be carried out by an authorised electrician. For the E-socket product variants, bulbs are not included. LED light source is part of the product.

VL 38 TABLE LAMP


Designed by Vilhelm Lauritzen

Light distribution diagrams


CARTESIAN

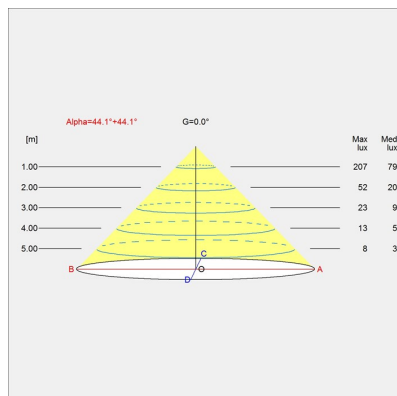

ISOLUX

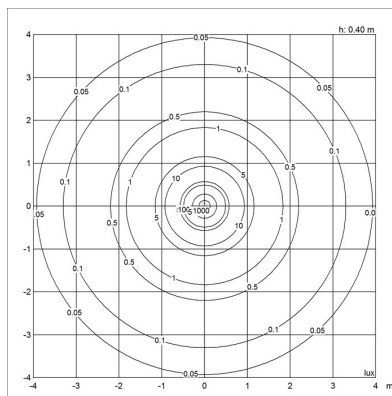

POLAR

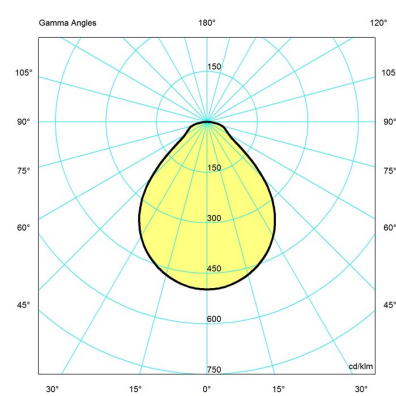

Variant Options

For particular variant options, please check our online Product Variants Configurator on the product detail page.

VARIANT NO.	LIGHT SOURCE	VOLTAGE/FRQ	LUMEN	FEATURES	CABLE
5744162322	LED 2700K 9.6W		416	-	-
5744163211	LED 2700K 9.6W		416	-	-

Variants

VARIANT NUMBER	COLOR, RAL	W / H / L (IN) / W (LB)
5744162322	WHITE, T08	135 / 380 / 175 IN / 2.2 LB
5744163211	BLACK, T09	135 / 380 / 175 IN / 2.2 LB